

# IES Indoor Report

Photometric Filename: LED UFO High Bay Light 150W-200W-240W 5000K.IES



## Indoor Luminaire Photometric Data

### Description Information

Luminaire Name: LED UFO High Bay Light 150W-200W-240W 5000K		Lum. Catalog:	Test ID:
Lamp Name:		Lamp Catalog:	Test Date: 2023/08/31
Manufacture: ILUMIA		Shld. Ang(°):	Test Machine: GON-2000
Test Lab: IES Testing Laboratory	Frequency(Hz): 50		Lamp CCT(K): Ra:
Lum. Size (W*L*H): 0.000m*0.000m*0.000m		Lum. Area (m <sup>2</sup> ): 0.000	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=30.0 γ=1.0	Temp. (°C): 25	Humidity (%): 50.0

### Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 36636.000	Luminaire Flux(lm): 36636.034	Field Angle(10%Imax): 133.7(°)	
Rated Power(W): 240	Luminaire Efficiency: 100.00%	Down Lumens&Percent: 34946.858lm 95.39%	
Rated Voltage(V): 220	Luminaire EER(lm/W): 158.187	Up Lumens&Percent: 1689.176lm 4.61%	
Tested Power(W): 231.600	Max. Candela(cd): 17122.711	S/MH: C0_a180=1.272 C90_270=1.306	
Lamps' Inside: 1	Max Cand@Ang.(°): C=90.0 γ=15.0	CIE Type: Semi-Direct	
Tested Electrics(V, A, pf): 223.1, 1.063, 0.976	Beam Angle(50%Imax): 87.6(°)	ErP Φ use(90°): 24868.648lm	
Lamp Size(W*L*H): 0.000m*0.000m*0.000m	Left=-44.0°, Right=43.7°	IRF (%): 123.492	

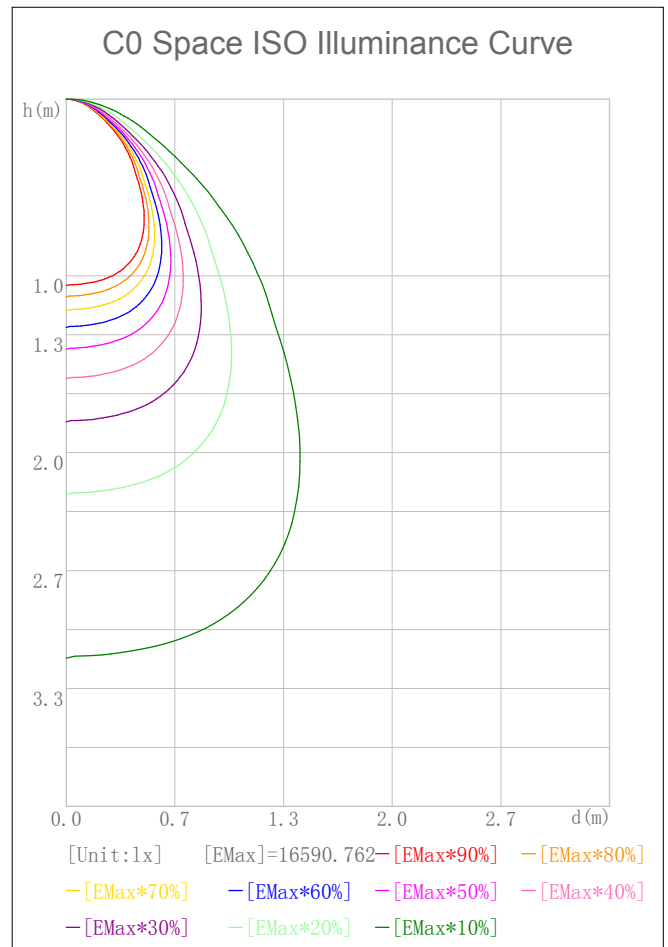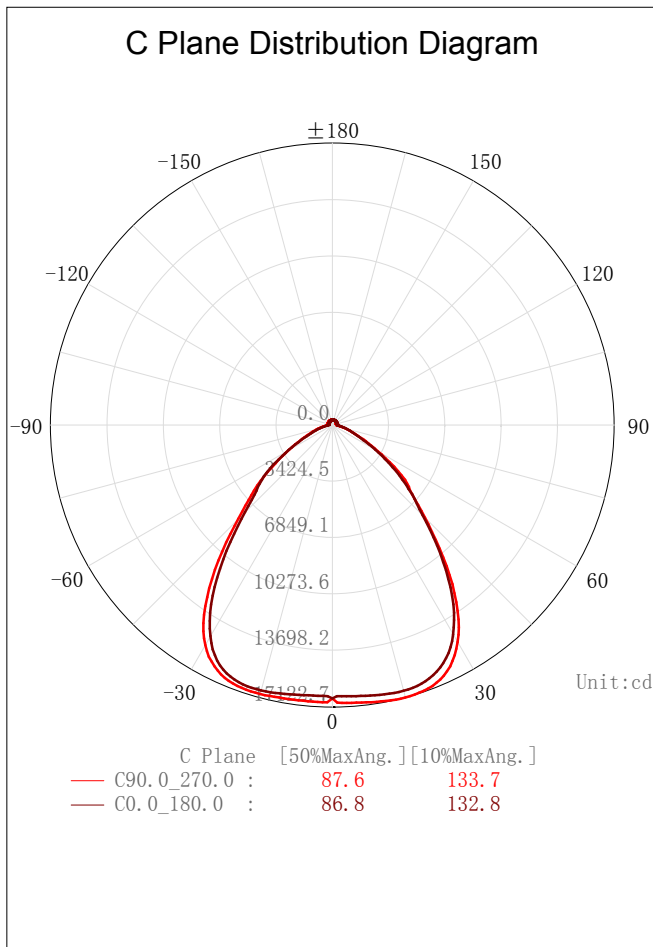



**IES Indoor Report**

**Photometric Filename:LED UFO High Bay Light 150W-200W-240W 5000K.IES**

**2D Plane Light Intensity Distribution Curve**

Lum. Name: LED UFO High Bay Light 150W-200W-240W 5000K	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab: IES Testing Laboratory
Manufacture: ILUMIA	Test Machine: GON-2000	Test Date: 2023/08/31

**C Plane Distribution Diagram**

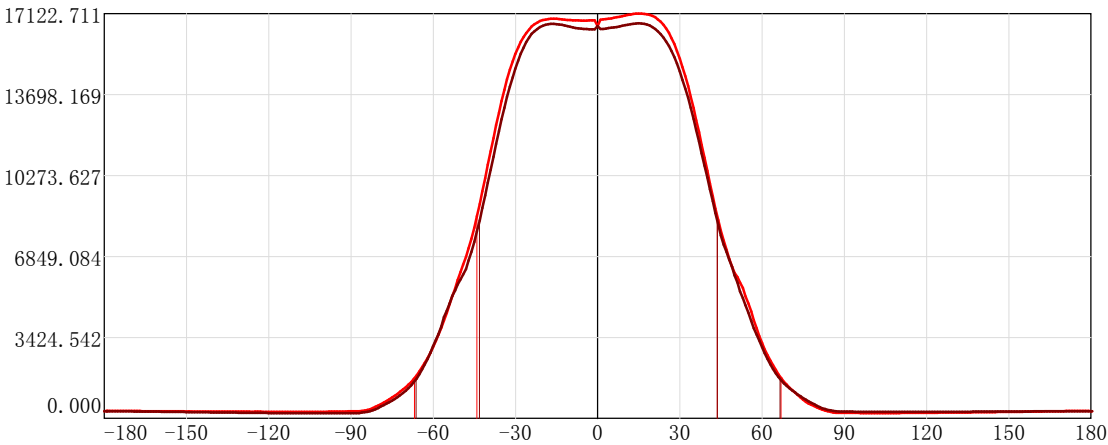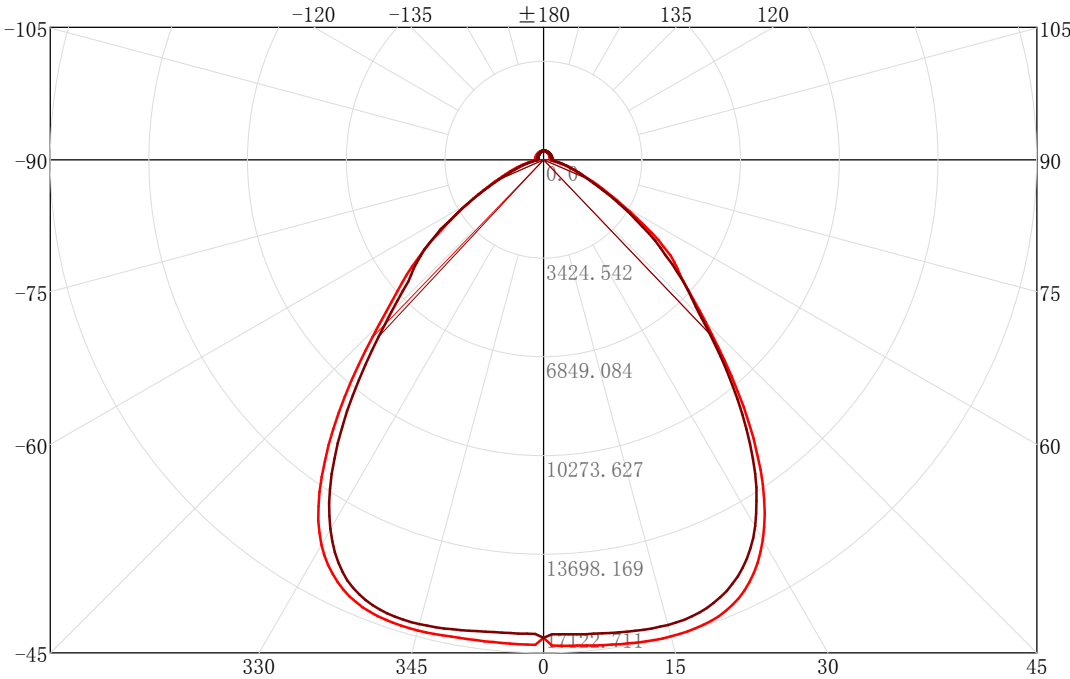

—	C Plane	[50%MaxAng.]	[10%MaxAng.]	Unit:cd
—	C90.0_270.0 :	87.6	133.7	
—	C0.0_180.0 :	86.8	132.8	


**IES Indoor Report**

**Photometric Filename:LED UFO High Bay Light 150W-200W-240W 5000K.IES**

**3D Light Intensity Distribution Modal**

Lum. Name: LED UFO High Bay Light 150W-200W-240W 5000K	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab: IES Testing Laboratory
Manufacture: ILUMIA	Test Machine: GON-2000	Test Date: 2023/08/31

3D Light Intensity Distribution Modal

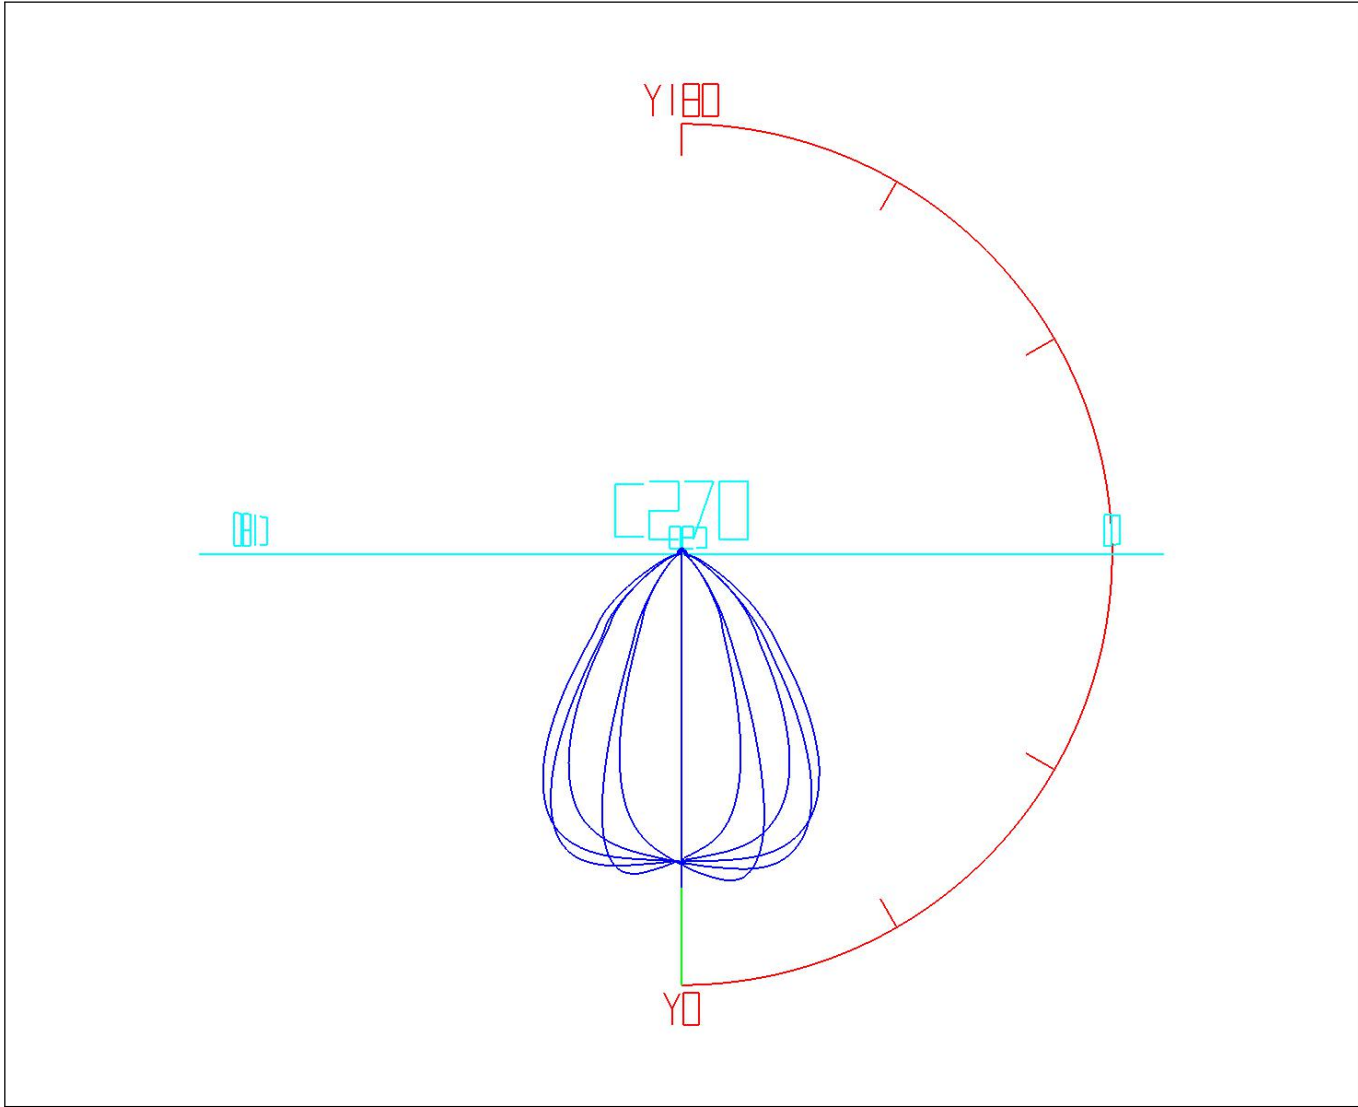


Curves: 3D Model ——— Fixture ——— Vert. HUD ——— Hori. HUD ———  
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

# IES Indoor Report

Photometric Filename:LED UFO High Bay Light 150W-200W-240W 5000K.IES

## Rectangle ISO Lighting Intensity Diagram

Lum. Name: LED UFO High Bay Light 150W-200W-240W 5000K	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab: IES Testing Laboratory
Manufacture: ILUMIA	Test Machine: GON-2000	Test Date: 2023/08/31

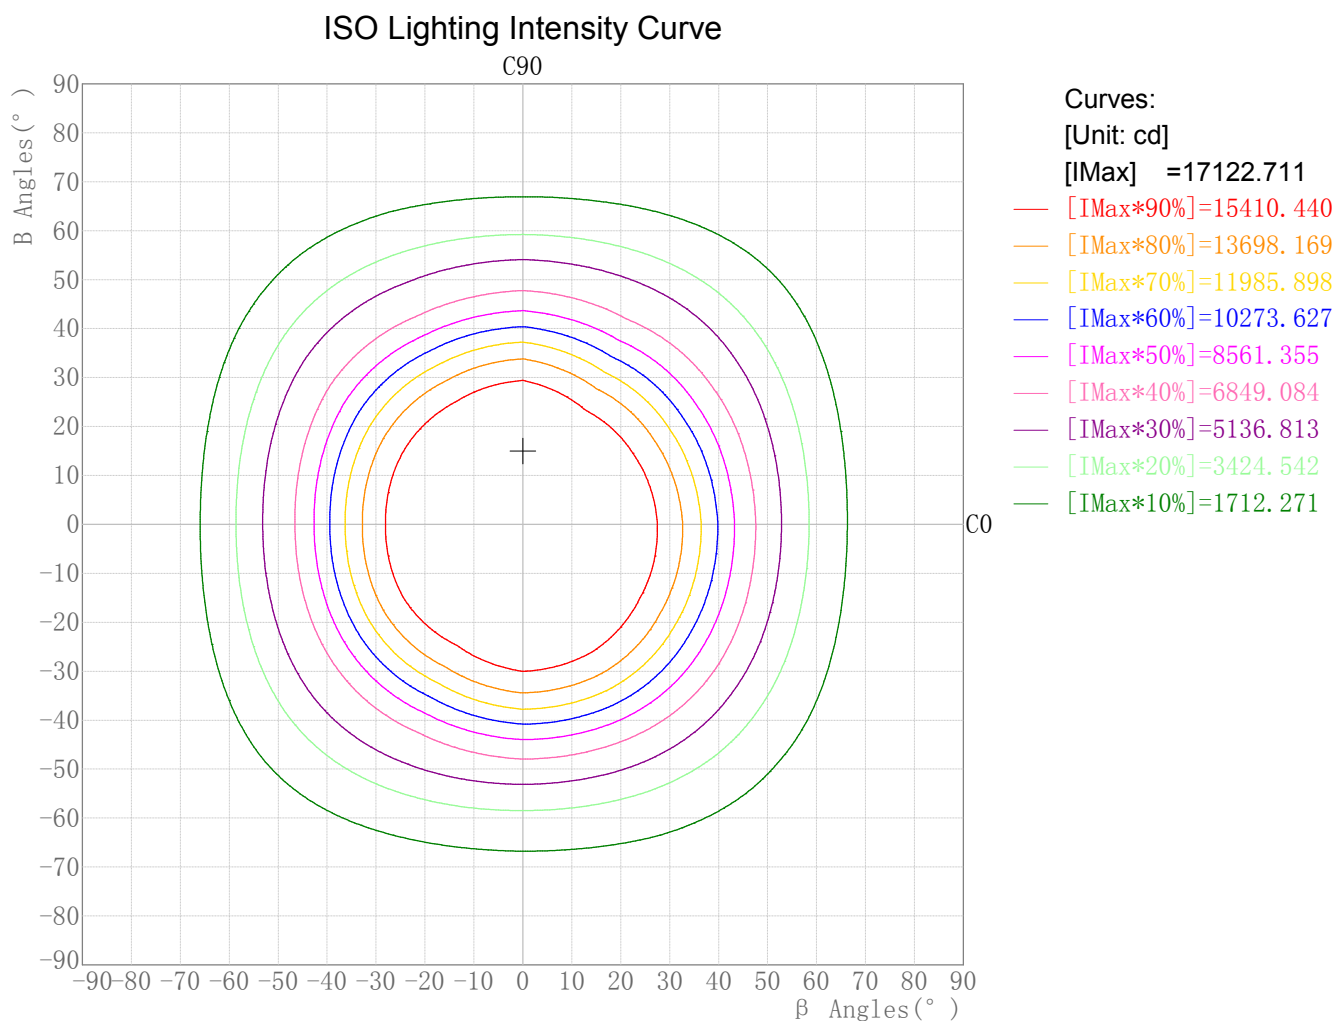


# IES Indoor Report

Photometric Filename: LED UFO High Bay Light 150W-200W-240W 5000K.IES

## Plane ISO-Illuminance Diagram

Lum. Name: LED UFO High Bay Light 150W-200W-240W 5000K	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab: IES Testing Laboratory
Manufacture: ILUMIA	Test Machine: GON-2000	Test Date: 2023/08/31

Plane ISO-Illuminance Curve

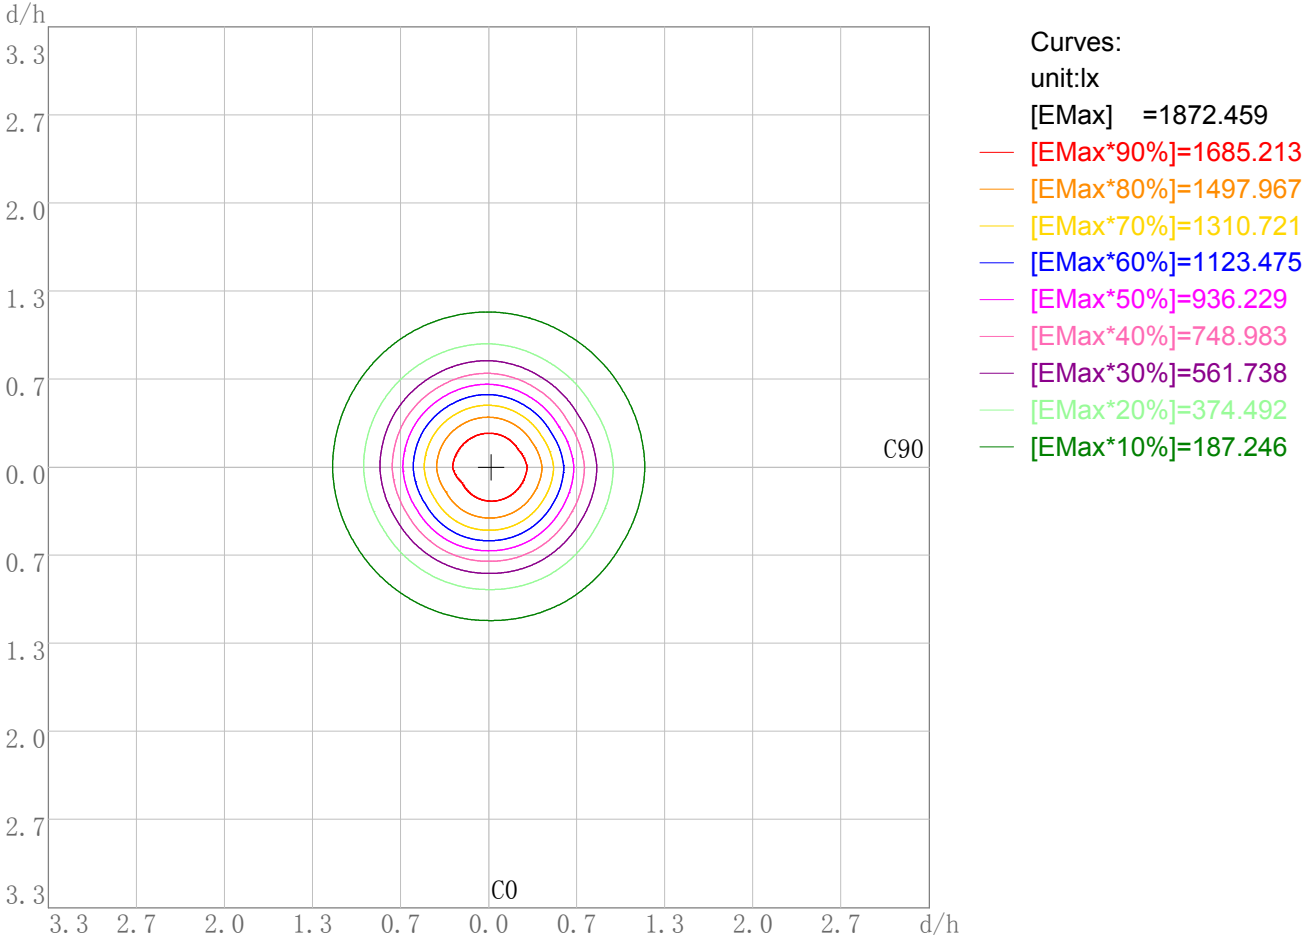

Working Plane Luminaire Mounting Height(m): 3.00  
Working Plane Maximum Illuminance(lx): 1872.46  
Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0


**IES Indoor Report**

**Photometric Filename:LED UFO High Bay Light 150W-200W-240W 5000K.IES**

**Space ISO Illuminance Diagram**

Lum. Name: LED UFO High Bay Light 150W-200W-240W 5000K	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab: IES Testing Laboratory
Manufacture: ILUMIA	Test Machine: GON-2000	Test Date: 2023/08/31

Space ISO Illuminance Curve

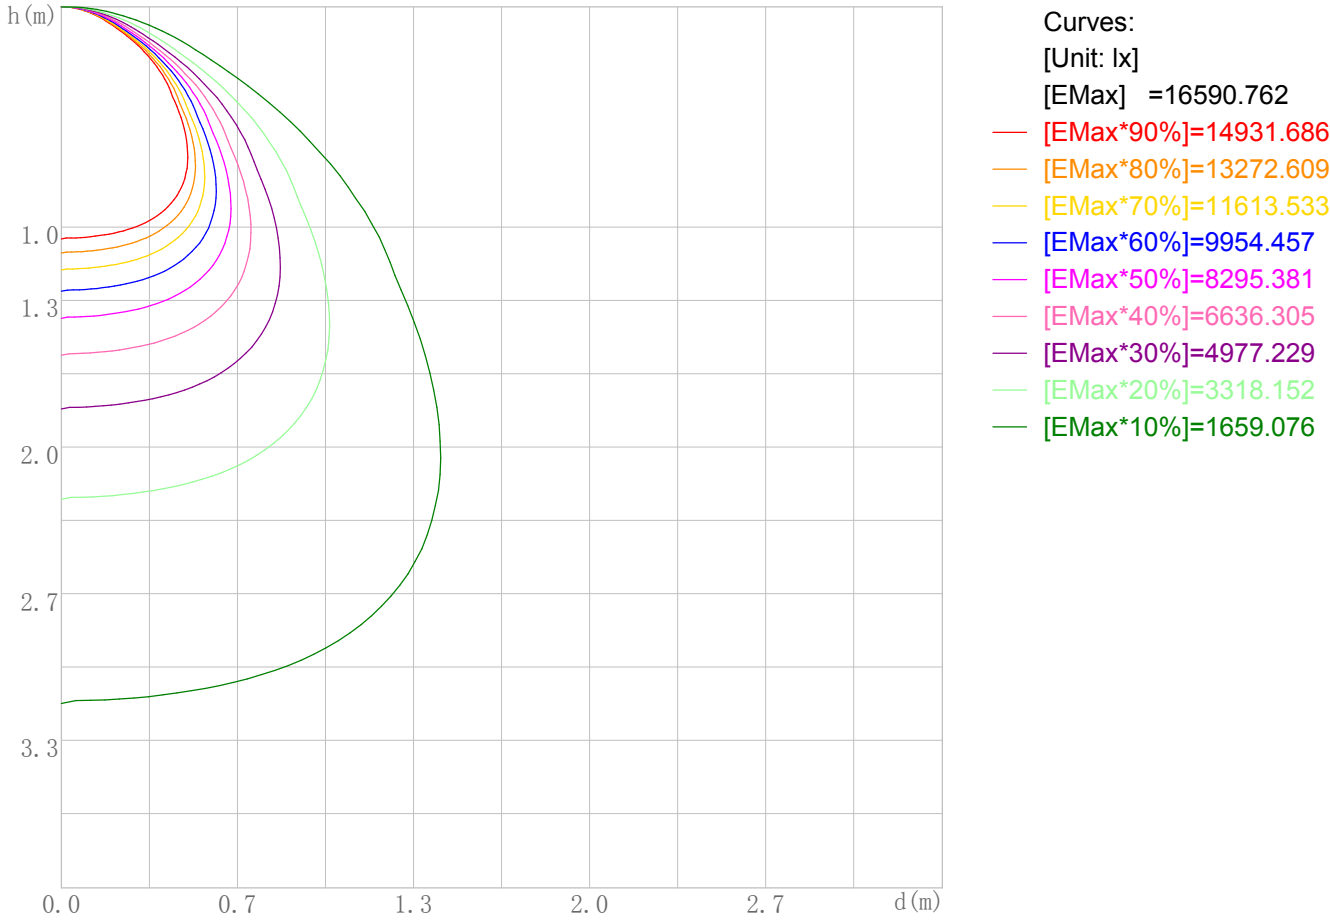

Space Plane Maximum Illuminance and @Angle:16590.76lx,0.0deg  
 Plane Maximum Lighting Intensity and @Angle:16710.357cd,0deg


# IES Indoor Report

Photometric Filename: LED UFO High Bay Light 150W-200W-240W 5000K.IES

## Illuminance-Distance Diagram

Lum. Name: LED UFO High Bay Light 150W-200W-240W 5000K	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab: IES Testing Laboratory
Manufacture: ILUMIA	Test Machine: GON-2000	Test Date: 2023/08/31

Illuminance-Distance Curve

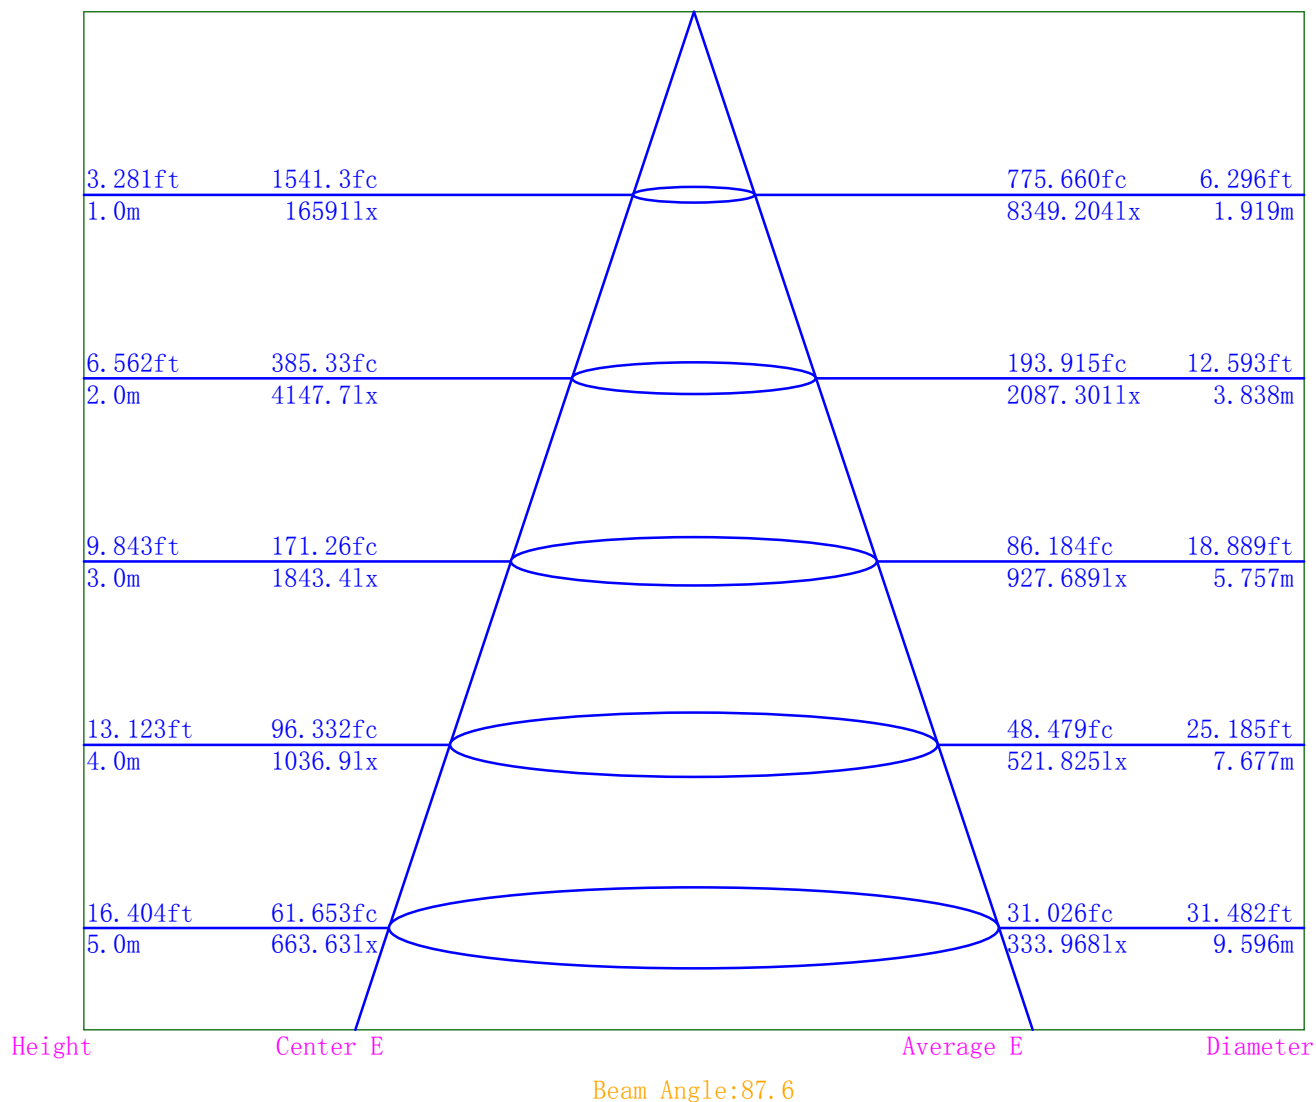

# IES Indoor Report

**Photometric Filename:LED UFO High Bay Light 150W-200W-240W 5000K.IES**

## Unified Glare Rating Table

Lum. Name: LED UFO High Bay Light 150W-200W-240W 5000K	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab: IES Testing Laboratory
Manufacture: ILUMIA	Test Machine: GON-2000	Test Date: 2023/08/31

## Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room Size	Vewed crosswise					Vewed endwise					
X=2H	Y=2H	10.9	12.2	11.4	12.7	13.1	10.9	12.2	11.4	12.7	13.1
	Y=3H	10.8	12.0	11.2	12.4	12.9	10.8	12.0	11.2	12.4	12.9
	Y=4H	10.7	11.8	11.2	12.2	12.7	10.7	11.8	11.2	12.2	12.7
	Y=6H	10.6	11.6	11.1	12.1	12.6	10.6	11.6	11.1	12.1	12.6
	Y=8H	10.6	11.5	11.1	12.0	12.5	10.6	11.5	11.1	12.0	12.5
	Y=12H	10.5	11.5	11.0	11.9	12.5	10.5	11.5	11.0	11.9	12.5
X=4H	Y=2H	10.7	11.8	11.2	12.2	12.7	10.7	11.8	11.2	12.2	12.7
	Y=3H	10.6	11.5	11.1	11.9	12.5	10.6	11.5	11.1	11.9	12.5
	Y=4H	10.5	11.3	11.0	11.8	12.3	10.5	11.3	11.0	11.8	12.3
	Y=6H	10.4	11.1	10.9	11.6	12.2	10.4	11.1	10.9	11.6	12.2
	Y=8H	10.3	11.0	10.9	11.5	12.1	10.3	11.0	10.9	11.5	12.1
	Y=12H	10.3	10.9	10.9	11.4	12.0	10.3	10.9	10.9	11.4	12.0
X=8H	Y=4H	10.3	11.0	10.9	11.5	12.1	10.3	11.0	10.9	11.5	12.1
	Y=6H	10.2	10.8	10.8	11.4	12.0	10.2	10.8	10.8	11.4	12.0
	Y=8H	10.2	10.7	10.8	11.3	11.8	10.2	10.7	10.8	11.3	11.8
	Y=12H	10.1	10.6	10.7	11.1	11.8	10.1	10.6	10.7	11.1	11.8
X=12H	Y=4H	10.3	10.9	10.9	11.4	12.0	10.3	10.9	10.9	11.4	12.0
	Y=6H	10.2	10.7	10.8	11.2	11.9	10.2	10.7	10.8	11.2	11.9
	Y=8H	10.1	10.6	10.7	11.1	11.8	10.1	10.6	10.7	11.1	11.8
Variations with the objerver position at spacings											
S=1.0H	0.0/0.0					0.0/0.0					
S=1.5H	0.0/0.0					0.0/0.0					
S=2.0H	0.0/0.0					0.0/0.0					
Reduced UGR Table:											
Nordic Standard Table:	BKO					BKO					
Correction Value	0.0					0.0					

o the CIE Pub. 117, data has been corrected, refers to the lamp's lumens 8.2flm.